



FT

LIMITES ADMISSIBLES :


Pression : < 0.5 Mpa

Vitesse : < 15m/s

Température : < -30 °C ~ 200 °C



Modèle	d1	d2	d3	d4	d5	d7	L1	L3	L4
PFT10	11.0	27	29.0	15	12	23	18.0	4	10.5
PFT12	14.2	32	32.0	20	14	25	19.0	5	8.5
PFT16	18.2	41	41.5	22	18	31	21.8	5	9.5
PFT20	21.2	45	43.8	30	21	35	22.5	5	11.0
PFT25	26.4	52	51.0	35	26	44	27.0	7	14.5
PFT30	31.0	58	57.0	40	32	48	29.0	8	12.5

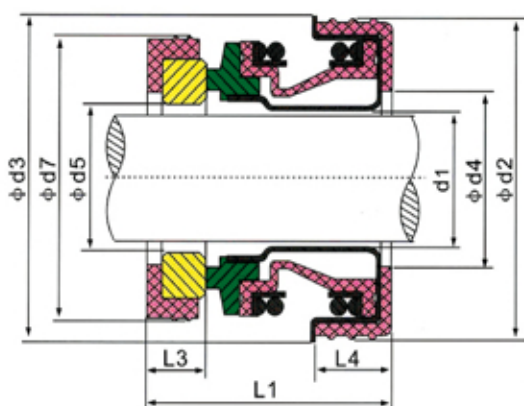

- Bague fixe (Ceramic/SIC/TC)
- Bague tournante (Carbon/ SIC/TC)
- Joint secondaire (NBR/ EPDM/VITON)
- Ressort & autres (S.S/SUS304/SUS316)