



# 210

### LIMITES ADMISSIBLES :

Pression : < 0.8 Mpa


Vitesse : < 10 m/s

Température : < -20 °C ~ 150 °C

Milieu : Eau, huile, et faible milieu corrosif



Modèle	d	D	D1	L1	L3	L2	L4
P14/210	14	24	25	6	15.2	29.2	34.2
P15/210	15	25	26	6	15.2	29.2	34.2
P16/210	16	26	27	6	15.2	29.2	34.2
P18/210	18	32	33	6	20.2	31.7	39.2
P20/210	20	34	35	6	20.2	31.7	39.2
P22/210	22	36	37	6	20.2	31.7	39.2
P24/210	24	38	39	6	20.2	34.2	44.2
P25/210	25	39	40	6	20.2	34.2	44.2
P28/210	28	42	43	6	26.2	36.2	44.2
P30/210	30	44	45	7	26.2	35.7	43.2

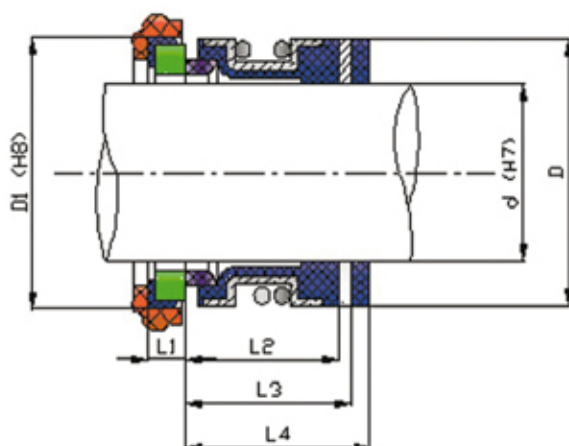

- Bague fixe (Ceramic/SiC/TC)
- Bague tournante (Carbon/ SiC/TC)
- Joint secondaire (NBR/ EPDM/VITON)
- Ressort & autres (Steel)