



# MF

## OPERATING LIMITS


Pressure: 0.5 MPa

Speed: 15 m/s

Temperature: -30 °C ~ 200 °C



Type	d	d1	d2	D	L	L1	L2	L3
PMF-12S	14.2	28.55	32	25	18.5	5	8	13.2
PMF-12M	14.2	30	35	24	18	5	7	13
PMF-12L	14.2	33.4	38	25	18	5	6.7	13
PMF-16	18.2	36.5	41.3	31	19.8	5	8	14.8
PMF-16L	18.2	38.1	41.3	31	19.8	5	8	14.8
PMF-20S	21.4	38	43.8	35	20.5	5	9.5	15.5
PMF-20	21.4	40	43.8	35	20.5	5	9.5	15.5
PMF-30	31.0	52	57	48	27	8	11	29.0

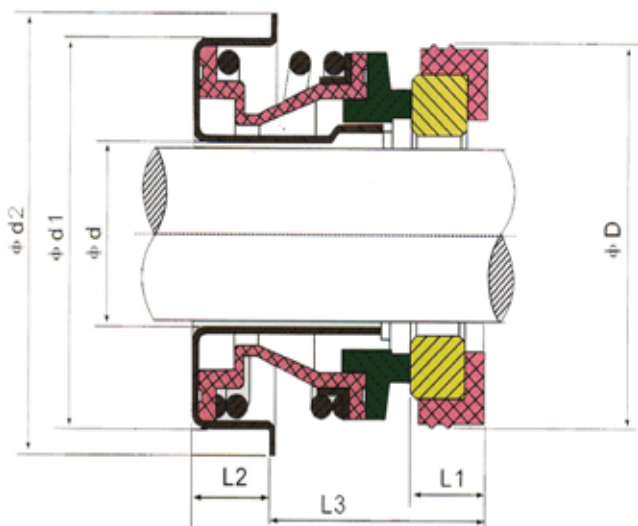

- **Stationary Ring** (Ceramic/SiC/TC)
- **Rotary Ring** (Carbon/ SiC/TC)
- **Secondary Seal** (NBR/ EPDM/VITON)
- **Spring & Other Parts** (S.S/SUS304/SUS316)