



FB

OPERATING LIMITS


Pressure: 0.6 MPa

Speed: 15 m/s

Temperature: -30 °C ~ 200 °C



Type	d1	d2	d3	d7	L1	L4
PFB12S	12	28.50	32	25	18.2	8.5
PFB12M	12	30	35	25	18.2	8.5
PFB12L	12	33.4	38	25	18.5	8.5
PFB16	16	36.5	41.5	30.5	20.5	8.5
PFB16L	16	38.10	41.5	30.5	20.5	8.5
PFB20	20	40	43.8	37	22	9.5

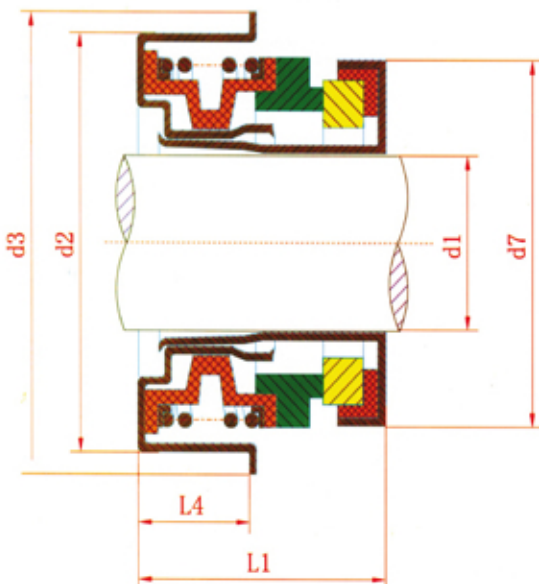

- Stationary Ring (Ceramic/SiC/TC)
- Rotary Ring (Carbon/ SiC/TC)
- Secondary Seal (NBR/ EPDM/VITON)
- Spring & Other Parts (S.S/SUS304/SUS316)