



IN

**OPERATING LIMITS**


Pressure: 1.2 MPa

Speed: 15m/s

Temperature: -30 °C ~ 200 °C



Type	d1	d3	d7	L1	L3
P14 IN	14	23	23.5	28	7.5
P16 IN	16	26	26.9	30	7
P17 IN	17	26	26.9	30	7
P18 IN	18	32	30.9	32	8
P19 IN	19	32	30.9	33	8
P20 IN	20	34	30.9	33	8
P22 IN	22	36	35.4	33	8
P23 IN	23	36	35.4	35	8
P24 IN	24	38	35.4	35	8
P25 IN	25	39	38.2	35.5	8.5
P26 IN	26	39	38.2	35.5	8.5
P28 IN	28	42	43.3	38	9
P30 IN	30	44	43.3	39	9
P32 IN	32	46	43.3	39	9
P33 IN	33	47	53.5	50.5	11.5
P34 IN	34	48	53.5	50.5	11.5
P35 IN	35	49	53.5	50.5	11.5
P36 IN	36	50	53.5	50.5	11.5
P38 IN	38	54	60.5	50.5	11.5
P40 IN	40	56	60.5	50.5	11.5
P45 IN	45	61	65.5	52.5	11.5
P50 IN	50	66	72.5	56.5	11.5
P55 IN	55	71	72.5	58.5	11.5

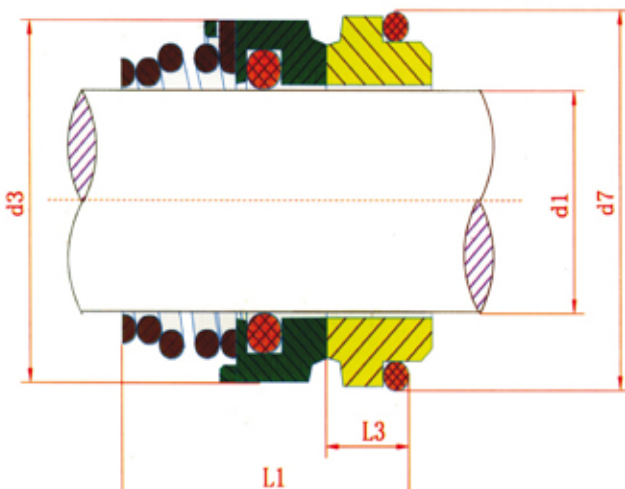

- Stationary Ring (Ceramic/SiC/TC)
- Rotary Ring (Carbon/ SiC/TC)
- Secondary Seal (NBR/ EPDM/VITON)
- Spring & Other Parts (S.S/SUS304/SUS316)