


CC Image



CC Drawing

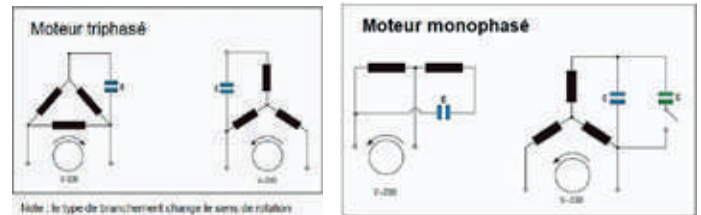

Characteristics:

- Rated Voltage 450 Vac Rated
- Rated frequency 50 / 60Hz
- Capacitance Tolerance ±5%
- Climatic category -25 C° / 85 C°
- Case Pla-PB
- Terminals FD

Applications:

- These capacitors are suitable for standard motor applications

References table:

Model	Capacitance μF	Case : Pla-PB FD	
		$\text{Ø} \times \text{H} \text{ (mm)}$	
C1-450	1	25	57
C1.25-450	1.25	25	57
C1.5-450	1.5	25	57
C2-450	2	25	57
C2.5-450	2.5	25	57
C3-450	3	25	57
C3.15-450	3.15	25	57
C3.2-450	2	25	57
C3.5-450	3.5	25	57
C4-450	4	25	57
C4.5-450	4.5	25	57
C5-450	5	30	57

References table:

Model	Capacitance μF	Case: Pla-PB FD	
		$\varnothing \times H$ (mm)	
C5.5-450	6	30	57
C6-450	5.5	30	57
C6.3-450	6.3	30	57
C7-450	7	30	57
C8-450	8	30	70
C9-450	9	30	70
C10-450	10	30	70
C12-450	12	35	70
C12.5-450	12.5	35	70
C14-450	14	35	70
C15-450	15	40	70
C16-450	16	40	70
C18-450	18	40	70
C20-450	20	40	70
C22-450	22	40	70
C25-450	25	40	94
C30-450	30	40	94
C31.5-450	31.5	40	94
C35-450	35	45	94
C40-450	40	45	94
C45-450	45	50	94
C50-450	50	50	94
C55-450	55	50	94
C60-450	60	50	120
C70-450	70	50	120
C75-450	75	50	120
C80-450	80	50	120
C90-450	90	60	120
C100-450	100	60	120