



CF Image

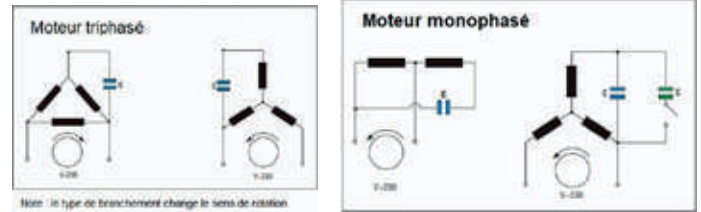

CF Drawing

Pla-PB : Boîtier plastique auto-éteignant (V2) sans fusible
CB250 : Câble bipolaire longueur 200mm



Characteristics:

- Rated Voltage 450 Vac Rated
- Rated frequency 50 / 60Hz
- Capacitance Tolerance $\pm 5\%$
- Climatic category $-25\text{ C}^\circ / 85\text{ C}^\circ$
- Case Pla-PB
- Terminals CB250

Applications:

- These capacitors are suitable for standard motor applications

References table

| Model | Capacitance μF | Case: Pla-PB CB250 | |
|--------|------------------------------|---|----|
| | | $\text{Ø} \times \text{H} \text{ (mm)}$ | |
| C1F | 1 | 25 | 57 |
| C1.25F | 1.25 | 25 | 57 |
| C1.5F | 1.5 | 25 | 57 |
| C2F | 2 | 25 | 57 |
| C2.5F | 2.5 | 25 | 57 |
| C3F | 3 | 25 | 57 |
| C3.15F | 3.15 | 25 | 57 |
| C3.5F | 3.5 | 25 | 57 |
| C4F | 4 | 25 | 57 |
| C4.5F | 4.5 | 30 | 57 |
| C5F | 5 | 30 | 57 |
| C5.5F | 5.5 | 30 | 57 |

References table

| Model | Capacitance μF | Case: Pla-PB CB250 | |
|--------|------------------------------|-----------------------------|-----|
| | | $\varnothing \times H$ (mm) | |
| C6F | 6 | 30 | 57 |
| C6.3F | 6.3 | 30 | 57 |
| C7F | 7 | 30 | 70 |
| C8F | 8 | 30 | 70 |
| C9F | 9 | 30 | 70 |
| C10F | 10 | 30 | 70 |
| C12F | 12 | 35 | 70 |
| C12.5F | 12.5 | 35 | 70 |
| C14F | 14 | 35 | 70 |
| C15F | 15 | 40 | 70 |
| C16F | 16 | 40 | 70 |
| C18F | 18 | 40 | 70 |
| C20F | 20 | 40 | 70 |
| C25F | 25 | 40 | 94 |
| C30F | 30 | 40 | 94 |
| C31.5F | 31.5 | 40 | 94 |
| C35F | 35 | 45 | 94 |
| C40F | 40 | 45 | 94 |
| C45F | 45 | 50 | 94 |
| C50F | 50 | 50 | 94 |
| C55F | 55 | 50 | 120 |
| C60F | 80 | 50 | 120 |
| C70F | 70 | 50 | 120 |
| C75F | 75 | 50 | 120 |
| C80F | 80 | 50 | 120 |
| C90F | 90 | 60 | 120 |
| C100F | 100 | 60 | 120 |