


PIM3S Image



PIM3S Drawing

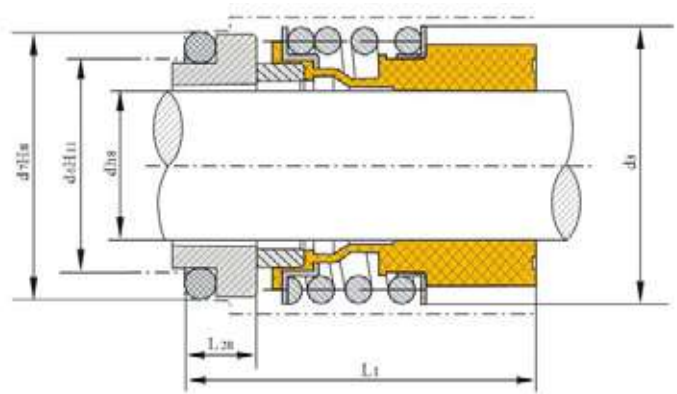

Allowable limits

Pressure : 1.2MPa
 Velocity : 10m/s
 Temperature : - 20 - 200°C

Component materials

Fixed ring: SIC
 Rotating ring: SIC
 Secondary seal: Viton
 Spring & others: SUS304

Application

Used for oils, water and other slightly corrosive fluids

PIM3S Dimension

Model	d	d3	d6	d7	L1	L28
P24IM3S	24	42.5	33	39	50	7.5
P25IM3S	25	42.5	34	40	50	7.5
P28IM3S	28	49	37	43	50	7.5
P30IM3S	30	49	39	45	50	7.5
P32IM3S	32	53.5	42	48	55	7.5
P35IM3S	35	57	44	50	55	7.5
P38IM3S	38	59	49	56	55	9
P40IM3S	40	62	5 i	58	55	9