


Image PIM

PIM Drawing

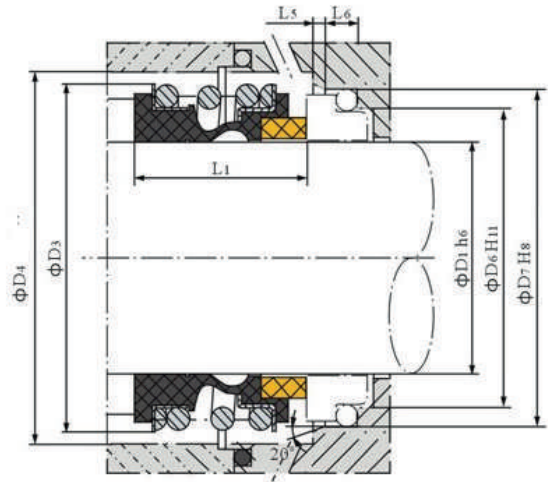

**Allowable limits**

Pressure : 1.2MPa  
 Velocity : 10m/s  
 Temperature : - 20 - 200°C

**Component materials**

Fixed ring: Ceramic  
 Rotating ring: Carbon  
 Secondary seal: NBR  
 Spring & others: SUS304

**Application**

Used for oils, water and other slightly corrosive fluids

**PIM Dimension**

Model	D1	D3	D6	D7	L1	L5	L6
P12IM	12	25.0	19	23	15	1.5	4
P14IM	14	28.5	21	25	17	1.5	4
P15IM	15	28.5	-	-	17	-	-
P16IM	16	28.5	23	27	17	1.5	4
P18IM	18	32	27	33	19.5	2	5
P19IM	19	36	-	-	21.5	2	5
P20IM	20	37	29	35	21.5	2	5
P22IM	22	37	31	37	21.5	2	5

## PIM Dimension

Model	D1	D3	D6	D7	L1	L5	L6
P24IM	24	42.5	33	39	22.5	2	5
P25IM	25	42.5	34	40	23	2	5
P28IM	28	49	37	43	26.5	2	5
P30IM	30	49	39	45	26.5	20	5
P32IM	32	53.5	42	48	27.5	2	5
P33IM	33	53.5	42	48	27.5	2	5
P35IM	35	57	44	50	28.5	2	5
P38IM	38	59	49	56	30	2	6
P40IM	40	62	51	58	30	2	6
P43IM	43	65.5	54	61	30	20	6
P45IM	45	68	56	63	30	2	6
P48IM	48	70.5	59	66	30.5	2	6
P50IM	50	74	62	70	30.5	2.5	6
P53IM	53	78.5	65	73	33	2.5	6
P55IM	55	81	67	75	35	2.5	6
P58IM	58	85.5	70	78	37	2.5	6
P60IM	60	88.5	72	80	38	3	6
P65IM	65	93.5	77	85	40	2.5	6
P68IM	68	96.5	81	90	40	3	7
P70IM	70	99.5	83	92	40	2.5	7
P75IM	75	107	88	97	40	2.5	7
P80IM	80	112	95	105	40	3	7
P85IM	85	120	100	110	41	3	7
P90IM	90	127	105	115	45	3	7
P95IM	95	132	110	120	46	3	7

## PIM Dimension

Model	D1	D3	D6	D7	L1	L5	L6
P100IM	100	137	115	125	47	3	7