


Image PIM2

PIM2 Drawing

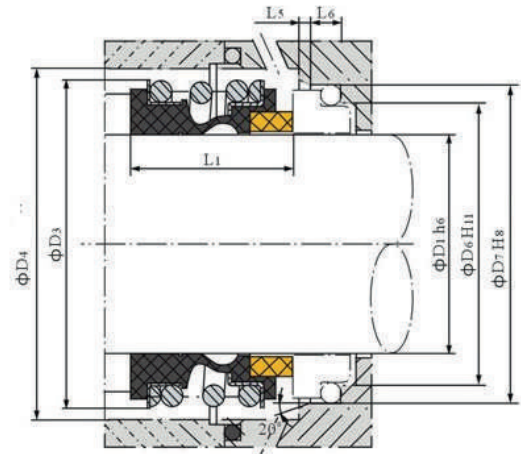

Allowable limits

Pressure : 1.2MPa
 Velocity : 10m/s
 Temperature : - 20 - 200°C

Component materials

Fixed ring: Ceramic
 Rotating ring: Carbon
 Secondary seal: NBR
 Spring & others: SUS304

Application

Used for oils, waters and other slightly corrosive fluids.

PIM2 Dimension

Model	D1	D3	D4	D6	D7	L	L2	L5
P12IM2	12	25	26	19	23	32.5	25.9	1.5
P14IM2	14	28.5	30	21	25	35	28.4	1.5
P15IM2	15	28.5	30	-	-	-	28.4	-
P16IM2	16	28.5	30	23	27	35	28.4	1.5
P18IM2	18	32	33	27	33	37.5	30	2
P19IM2	19	36	38	-	-	-	30	2
P20IM2	20	37	38	29	35	37.5	30	2
P22IM2	22	37	38	31	37	37.5	30	2

PIM2 Dimension

Model	D1	D3	D4	D6	D7	L	L2	L5
P24IM2	24	42.5	44	33	39	40	32.5	2
P25IM2	25	42.5	44	34	40	40	32.5	2
P28IM2	28	49	50	37	43	42.5	35	2
P30IM2	30	49	50	39	45	42.5	35	20
P32IM2	32	53.5	55	42	48	42.5	35	2
P33IM2	33	53.5	55	42	48	42.5	35	2
P35IM2	35	57	59	44	50	42.5	35	2
P38IM2	38	59	61	49	56	45	36	2
P40IM2	40	62	64	51	58	45	36	2
P43IM2	43	65.5	67	54	61	45	36	20
P45IM2	45	68	70	56	63	45	36	2
P48IM2	48	70.5	74	59	66	45	36	2
P50IM2	50	74	77	62	70	47.5	38	2.5
P53IM2	53	78.5	81	65	73	47.5	36.5	2.5
P55IM2	55	81	83	67	75	47.5	36.5	2.5
P58IM2	58	85.5	88	70	78	52.5	41.5	2.5
P60IM2	60	88.5	91	72	80	52.5	41.5	3
P65IM2	65	93.5	96	77	85	52.5	41.5	2.5
P68IM2	68	96.5	100	81	90	52.5	41.2	3
P70IM2	70	99.5	103	83	92	60	48.7	2.5
P75IM2	75	107	110	88	97	60	48.7	2.5
P80IM2	80	112	116	95	105	60	48	3
P85IM2	85	120	124	100	110	60	46	3
P90IM2	90	127	131	105	115	65	51	3
P95IM2	95	132	136	110	120	65	51	3

PIM2 Dimension

Model	D1	D3	D4	D6	D7	L	L2	L5
P100IM2	100	137	140	115	125	65	51	3